

TEST REPORT NO: 160537

Date: 27 January 2020


**SMD CONTRACTS LTD
UNIT F2, PITTMAN WAY, FULWOOD
PRESTON
LANCASHIRE
PR2 9ZD
UNITED KINGDOM**

The following sample(s) was/were submitted and identified by/on behalf of the client as:

Retailer	Not Specified
Description of article	RIO (PVC VINYL) GREY FABRIC
Retailer style number	GREY
Retailer Standard Number	SMD CONTRACT FABRIC
Order No./ Buyer	RIO
Quality/Fibre Composition	100% PVC
Date Sample(s) Received:	16 December 2019

Tests	Pass	Fail	Remarks
Abrasion Resistance			See results

Signature



Lucy Peberdy Technologist

For and on behalf of
SGS United Kingdom Ltd

All samples are conditioned to ISO 139 where conditioning is required (unless otherwise stated)

This document is issued by the Company under its General Conditions of Service accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only


Customer: SMD CONTRACTS LTD **Test Report No:** 160537

Test Results

Abrasion Resistance (BS EN ISO 12947-1:1999/BS EN ISO 12947-2:2016) 12kPa

To end point

Head 1 Breakdown	>350,000 Rubs
Head 2 Breakdown	>350,000 Rubs
Head 3 Breakdown	>350,000 Rubs
Lowest Breakdown	>350,000 Rubs
Shade Change	4-5 3000 Rubs

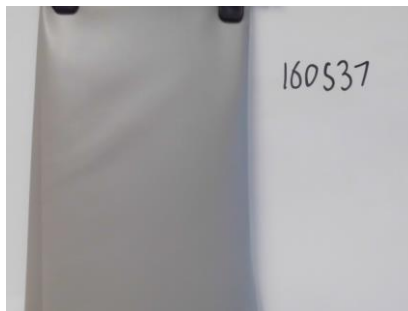

End of Report

This document is issued by the Company under its General Conditions of Service accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only